


CPX-LW

Lashing Wire

*Precision-drawn stainless-steel wire for consistent tension
and corrosion resistance.*

Introduction:

The ComponexX Lashing Wire Series is designed for professionals who demand performance, consistency, and strength in every coil. Used to secure aerial cables and bundles to messenger strands, each coil is precision-annealed, inspected, and tension-tested to ensure smooth lashing performance and uniform diameter across the entire length.

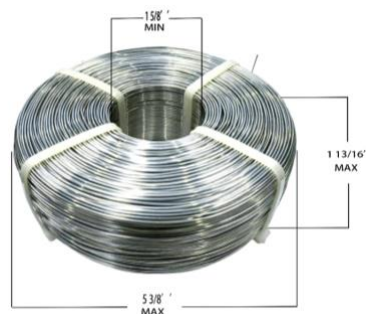

Available in 302, 316, and 430 stainless steel, ComponexX lashing wire delivers the ideal balance of tensile strength, corrosion resistance, and workability for telecom, broadband, and utility applications. Every coil is produced under stringent QC standards and packaged for clean, efficient field use. Built for installers. Proven on every strand.

Technical Specifications:

NO	TYPE	Model	MATERIAL DESCRIPTION	CHEMICAL COMPOSITION % (HEAT ANALYSIS)								
				C	Mn	P	S	Si	Cr	Ni	Mo	Average Break Strength
				100%	100%	100%	100%	100%	100%	100%	100%	
1	430	CX-430SS	.045"/1200	0.12	1.00	0.04	0.03	1.00	16.00/18.00		-	125LBS
2	302	CX-302SS	.045"/1200	0.08	2.00	0.04	0.03	1.00	18.00/20.00	8.00/10.50	-	165LBS
3	302	CX-302SS-1	.038"/1600	0.08	2.00	0.04	0.03	1.00	18.00/20.00	8.00/10.50	-	115LBS
4	316	CX-316SS	.045"/1200	0.08	2.00	0.04	0.03	1.00	16.00/18.00	10.00/14.00	2.00/3.00	165LBS

Packing:

- Standard packaging is 6 rolls per box
- Packaging can be modified to requirements

